

APPENDIX

[note] The information in this manual is subject to change without prior notice, and images used in this manual may differ from the actual image.

CONTENTS

- APPENDIX -	3
1. Firmware Upgrade	3
1.1 What is Firmware Upgrade?.....	3
1.2 Notes on Firmware Upgrade	3
1.3 Downloading Latest Firmware.....	3
1.4 Firmware Upgrade	4
2. Multi-Monitor Set-up	7
2.1 What is Multi-Monitor Set-up?	7
2.2 Caution	7
2.3 Multi-Monitor Set-up.....	7
2.4 Multi-Monitor & USB Port connection	10

- APPENDIX -

1. Firmware Upgrade

1.1 What is Firmware Upgrade?

Nexio provides firmware upgrade service in order to keep Nexio Touch Screen as latest products. By USB Downloader, firmware can simply be upgraded and latest technology can be provided. Please be noted that firmware upgrade might be limited depending on hardware.

1.2 Notes on Firmware Upgrade

User is responsible for unexpected happenings during firmware upgrade. Before starting firmware upgrade, please check Touch Screen Model and PC system to prepare normal firmware upgrade. Do not off power or terminate USB Downloader during the firmware upgrade.

1.3 Downloading Latest Firmware

Please contact suppliers for a latest firmware.

Please refer to Contact Us at NEXIO website for contact details.




URL: <http://www.inexio.co.kr/>

1.4 Firmware Upgrade

1.4.1 Upgrade Preparation

Please check Touch Screen is well connected to PC and working. Prepare USB Downloader and get latest firmware. Firmware can be downloaded from Nexio home page. Close programs that are related with Touch Screen.

[note] It shows '**No Touchscreen**' in Touchscreen Informations and inactivates check Box of **Local File** and button of **Update Start** as bellowed picture when touch screen does not connect to computer

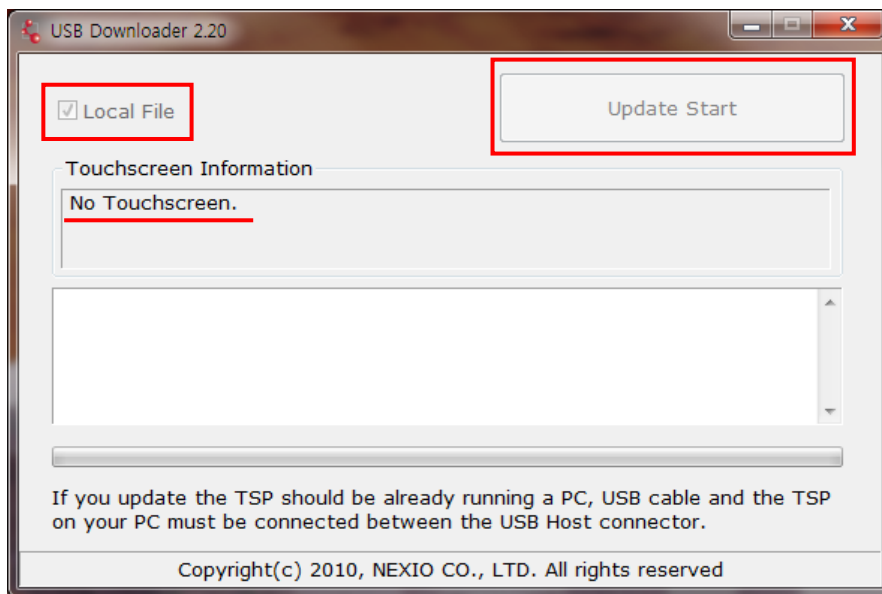

1.4.2 How to Upgrade

1.4.2.1 Run USB Downloader

Run USB Downloader.


[note] Please download updated firmware file through touch screen installation CD or supplier. In case **Local file** is not selected, Button of **Update Start** will be inactivated.



1.4.2.2 Update Start


After selecting **Update Start**, Open Window will be popup.

[note] Touch Screen might not work if wrong firmware is upgraded.

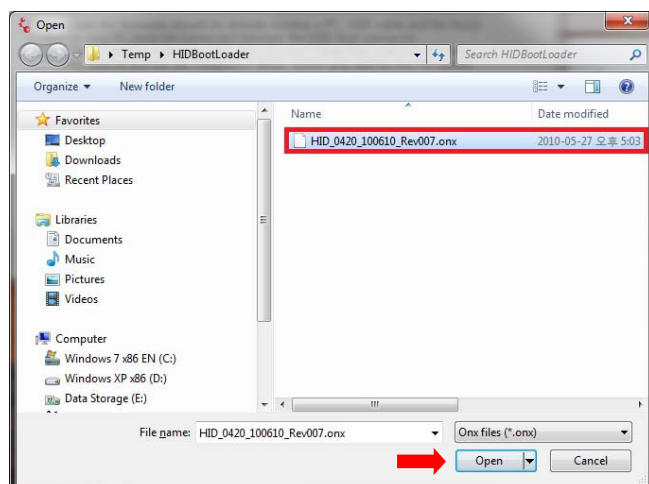

Upgrade starts as below.

[note] Do not off PC till upgrade is completed. During upgrading Check Box of **Local File** and Button of **Update Start** will be inactivated. As updating is finished, Check Box and Button will be activated. It shows '**Success to update Touchscreen**' after finishing updating successfully.

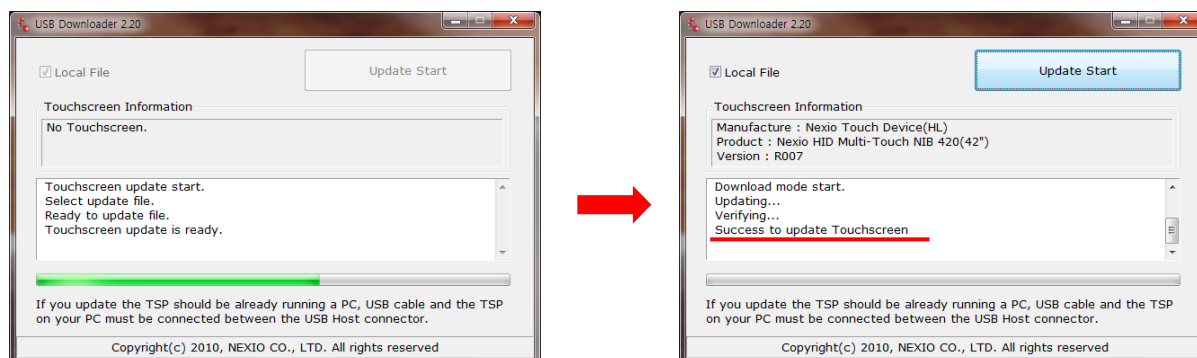

1.4.2.3 Complete Firmware Upgrade

Close **USB Downloader** after complete firmware upgrade, Touch Screen will be working.

[note] Please reconnect USB cable in case Touch Screen is not working.

2. Multi-Monitor Set-up

2.1 What is Multi-Monitor Set-up?

It sets up **Touch Screen** to be matched with Display to use Monitors and Touch Screen more than 2 each by **Multi-Monitor** Set-up.

It is available in more than **Windows 7 Professional**.

2.2 Caution

Go to **[Control Panel]** → **[Tablet PC Settings]**

[Tablet PC Settings] is automatically added on **[Control Panel]** once plug in **Touch Screen**.

And it will be removed once plug out it.


2.3 Multi-Monitor Set-up


2.3.1 Run [Table PC Settings]

Check the **Touch Screen** performance after connecting to computer.

Run **[Start]** → **[Control Panel]** → **[Table PC Settings]**


[note] Surely check the **Touch Screen** performance first, and run **[Control Panel]** → **[Tablet PC Settings]**

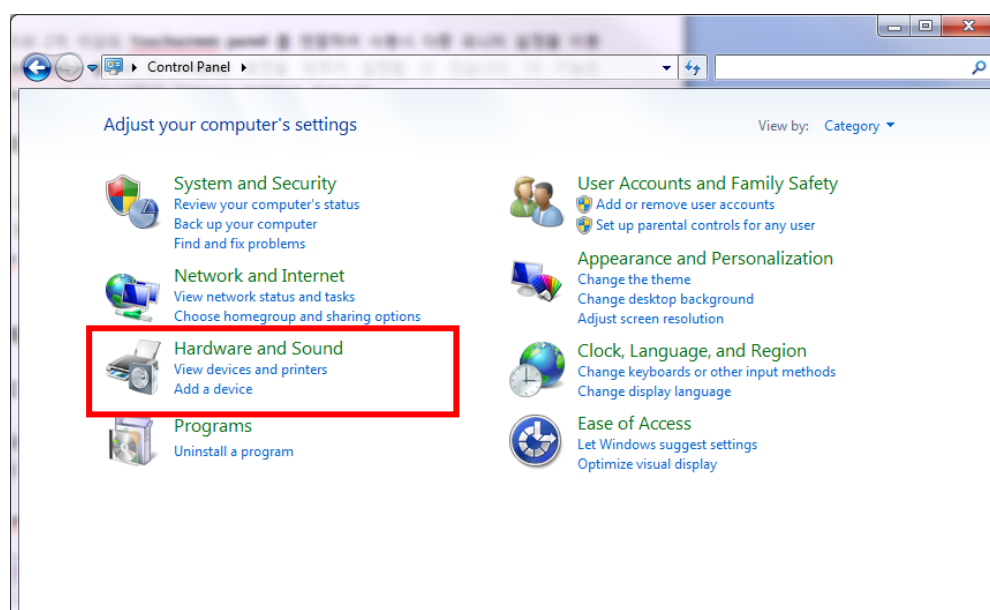

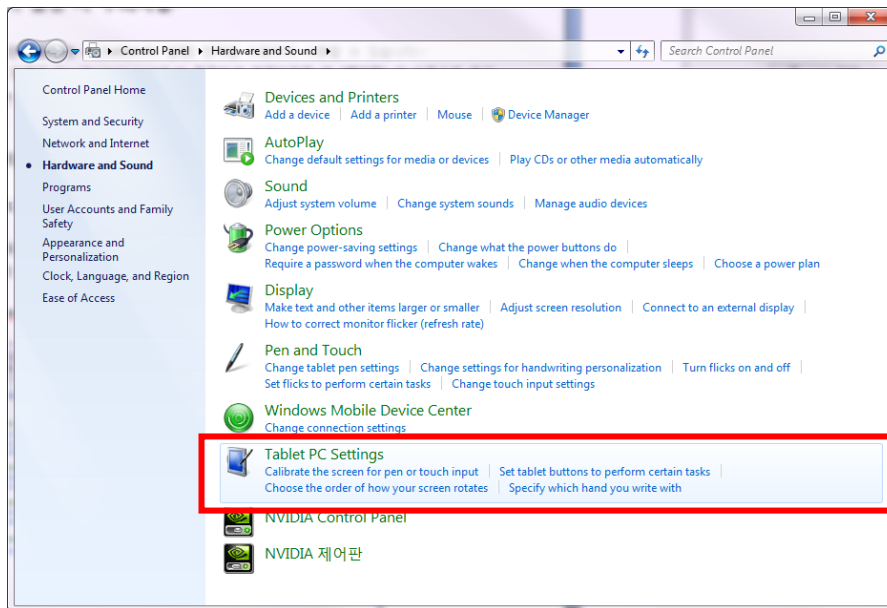


2.3.2 Match Touch Screen to Display

Run **[Setup]** in **[Configure]**

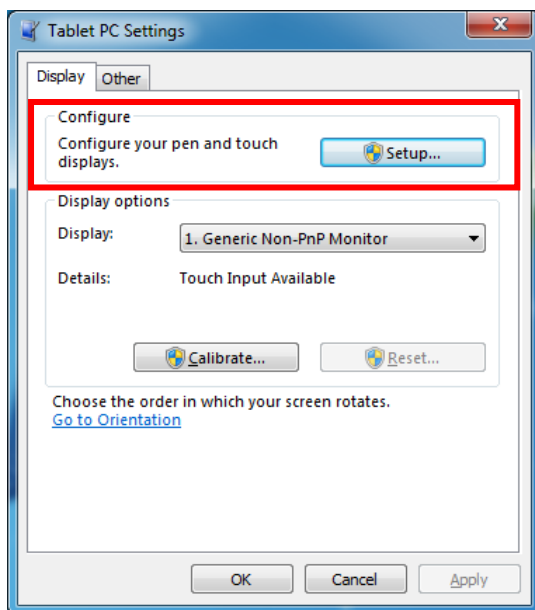


Select **[Identify pen or touch input screens]** window on **[Touch input]**

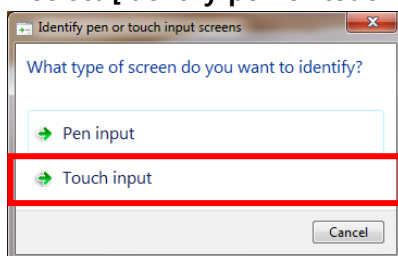


Displays show as below in full by the order of **Display number**.

"Touch" the **Touch Screen #1** to match it to Display.

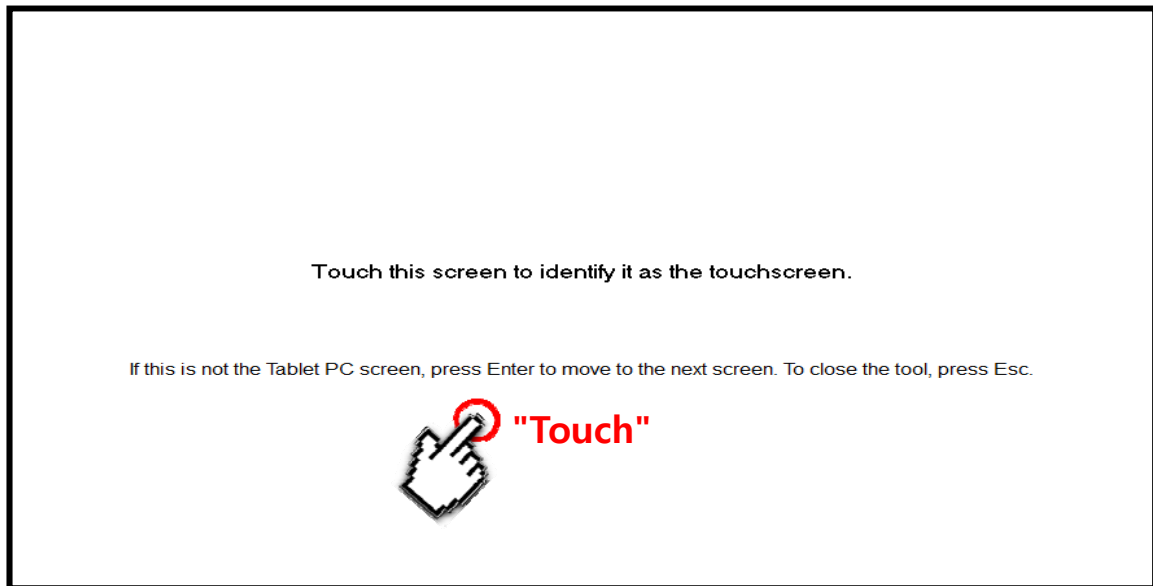

<Enter> to go to next Display and "Touch" the **Touch Screen #2**

You can **setup** more **displays** likewise.

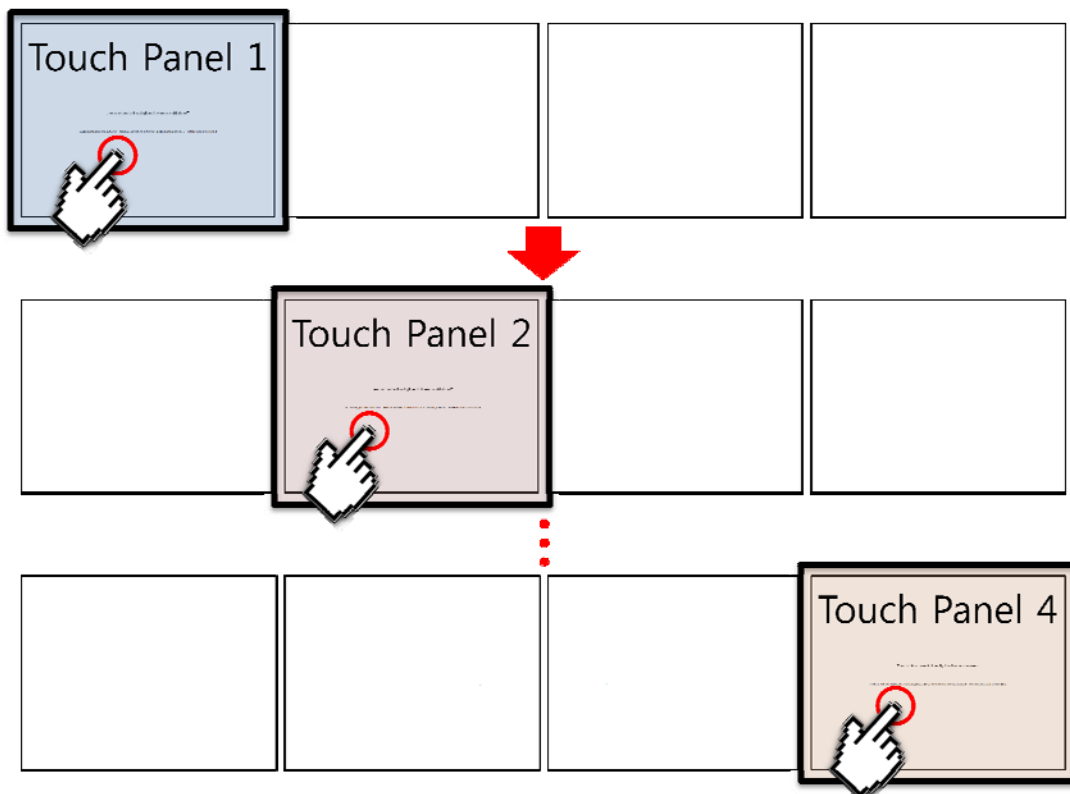


[note] This manual describes instructions to use **four numbers of Monitors**

2.4 Multi-Monitor & USB Port connection

2.4.1 Connection diagram of Display, Touch Screen and USB Port


Connection of **Display, Touch Screen and USB Port** is as follows after **completion** of [setup]

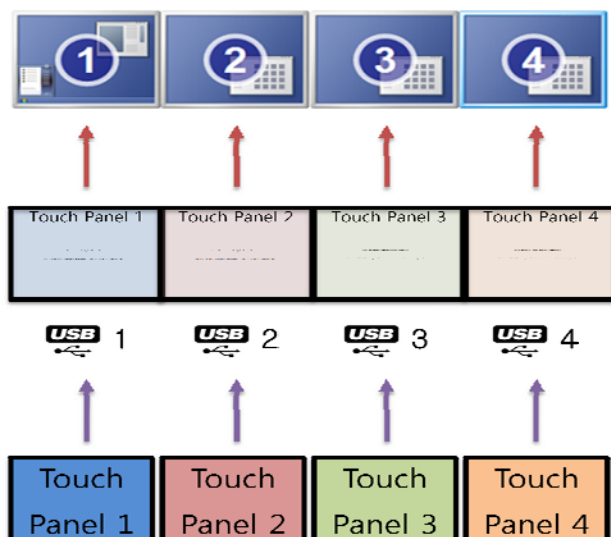

2.4.2 Connection diagram after disconnection of USB port USB


Display and USB port will be kept as follows after **disconnection**.

Windows 7 manages the **connection data** of **Display and USB port**

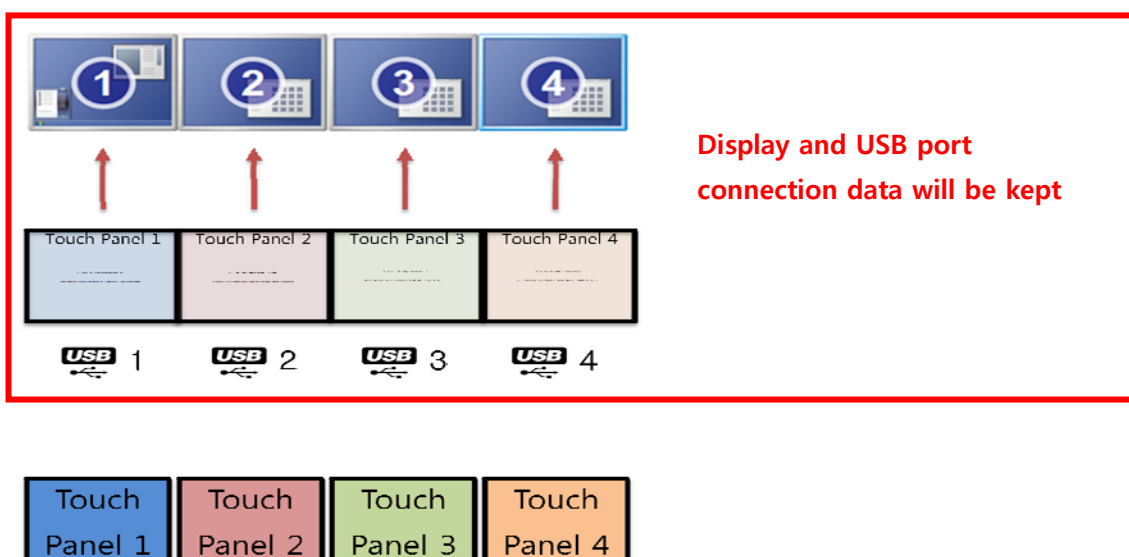


2.4.3 Connection diagram after changing of USB port.

If the connection of **Touch Screen** and **USB port** is changed, **Display** will be also changed.
Namely, "Touch" the **Touch Screen #1**, the **Display #2** operates.

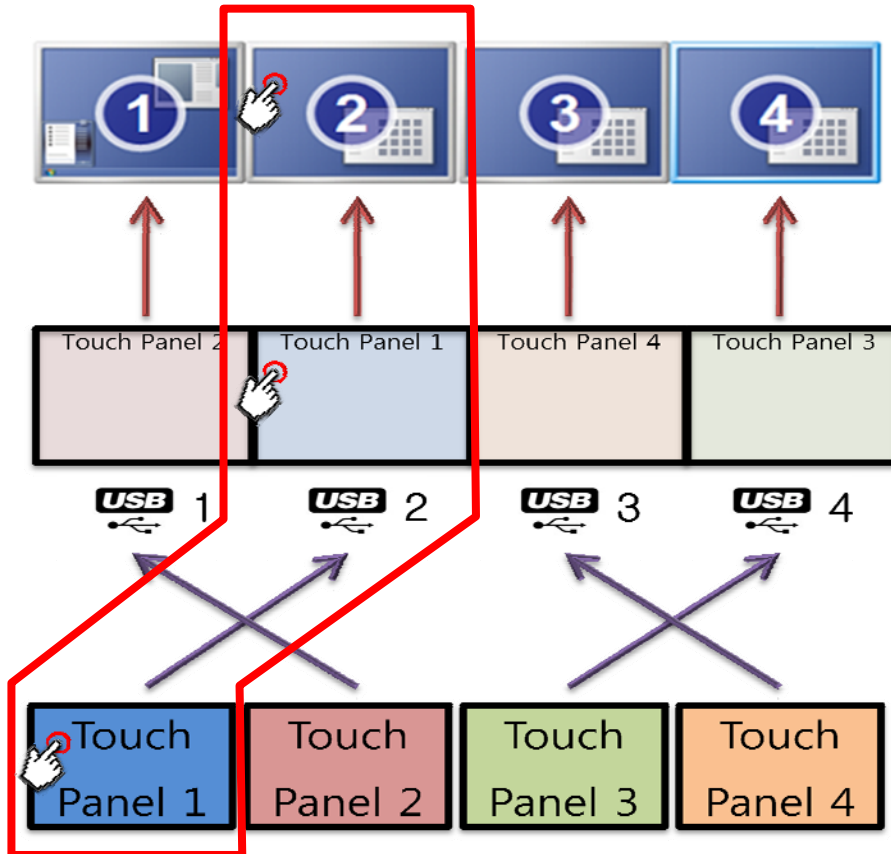

2.4.4 Re-setup Multi-Monitor when change USB port.

It is necessary to **re-setup Multi-Monitor** after **changing USB port** by running [Tablet PC setup] -> [Configure] -> [Setup]

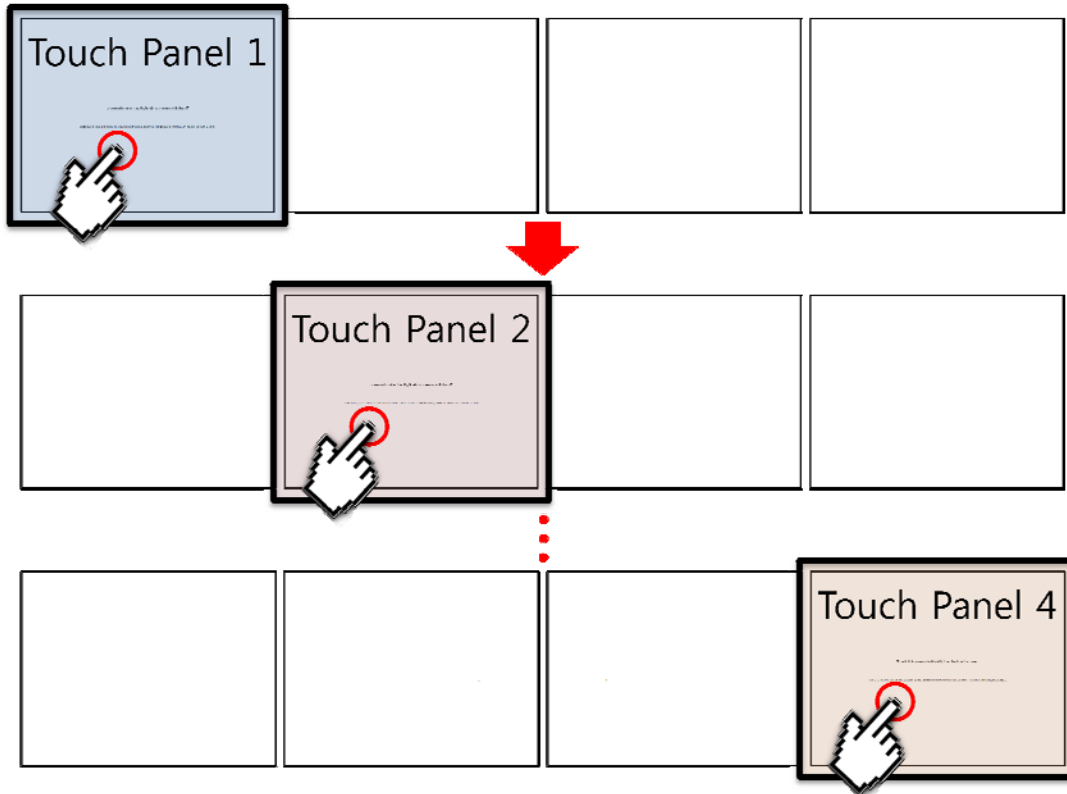

After completion of **re-setup** of **Multi-Monitor**, **Display** will be **changed**. Namely, "Touch" the **Touch Screen #1**, the **Display #1** operates.

